

2.17// BS EN 12334 RUBBER DISC SWING CHECK VALVE (SKYH44J), PN10/16



FEATURES

Connection Ends: : Flange to BS EN 1092-2:1997

Working Pressure: PN10/16

Temperature Range: 0°C - 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

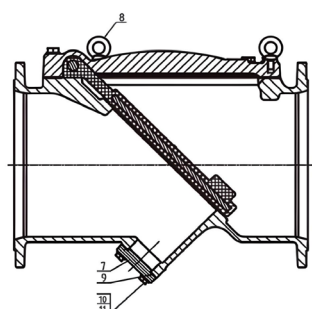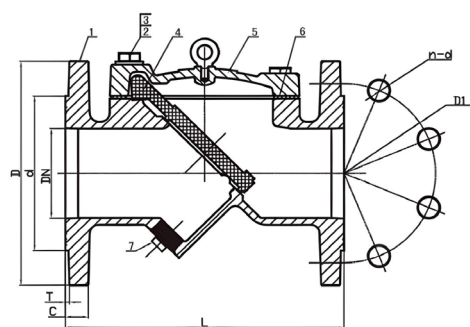

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	7	≤DN300:Plug	Plug: Malleable Iron Galvanized
2	Bolt	CS Zinc Plated SS304, SS316	≥DN400:Cover	Cover: EN-GJS-450-10	
3	Washer	CS Zinc Plated SS304, SS316	8	Eye Bolt	CS Zinc Plated SS304, SS316
4	Disc	Carbon Steel + EPDM Carbon Steel+NBR	9	O-Ring	NBR EPDM
5	Bonnet	EN-GJS-450-10	10	Bolt	SS304
6	Bonnet Gasket	EPDM NBR	11	Washer	SS304

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.