

2.18// DIN EN 12334 RUBBER DISC SWING CHECK VALVE (SKYH44J), PN10/16


FEATURES

Connection Ends: Flange to DIN EN 1092-2:1997

Working Pressure: PN10/16

Temperature Range: 0°C - 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/ AWWA C550

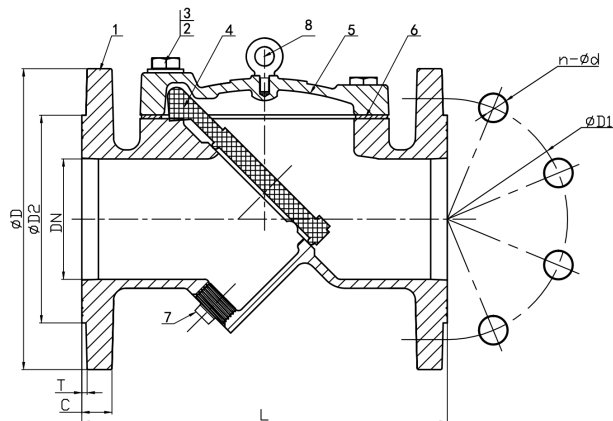

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	5	Bonnet	EN-GJS-450-10
2	Bolt	CS Zinc Plated SS304, SS316	6	Bonnet Gasket	EPDM NBR
3	Washer	CS Zinc Plated SS304, SS316	7	Plug	Plug: Malleable Iron Galvanized
4	Disc	Carbon Steel + EPDM Carbon Steel+NBR	8	Eye Bolt	CS Zinc Plated SS304, SS316

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.



DIMENSIONS

DN		PN	Dimensions (mm)						
Inch	mm		L	D	D1	d	C	T	n-φL
2"	50	10/16	200	165	125	99	19	3	4-φ19
2.5"	65	10/16	240	185	145	118	19	3	4-φ19
3"	80	10/16	260	200	160	132	19	3	8-φ19
4"	100	10/16	300	220	180	156	19	3	8-φ19
6"	150	10/16	400	285	240	211	19	3	8-φ23
8"	200	10	500	340	295	266	20	3	8-φ23
		16	500	340	295	266	20	3	12-φ23
10"	250	10	600	405	350	319	22	3	12-φ23
		16	600	405	355	319	22	3	12-φ28
12"	300	10	700	460	400	370	24.5	4	12-φ23
		16	700	460	410	370	24.5	4	12-φ28