

2.12// DIN F4 FLANGED RESILIENT OS&Y GATE VALVE (SKYXZ41X), PN10/16


FEATURES

Connection Ends: Flange to DIN EN 1092-2:1997

Working Pressure: PN10/16

Temperature Range: 0°C - 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/ AWWA C550

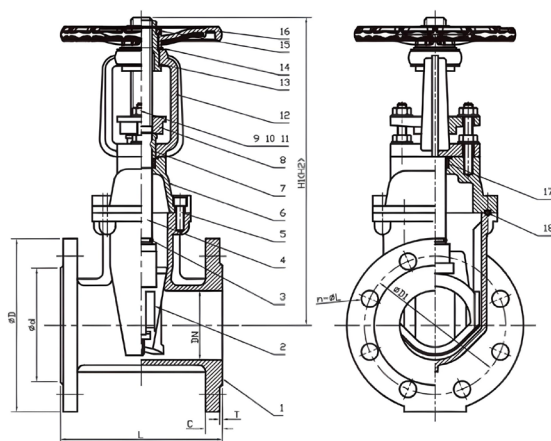

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	10	Stud	CS Zinc Plated SS304, SS316
2	Resilient Wedge Disc	EN-GJS-450-10+EPDM	11	Nut	CS Zinc Plated SS304, SS316
3	O-Ring	NBR EPDM	12	Yoke	EN-GJS-450-10
4	Stem	SS SS304, SS316, SS420, SS431	13	Stem Nut	Brass HPb59-1
5	Nut	CS Zinc Plated SS304, SS316	14	Washer	Brass HPb59-1 SS304, SS316
6	Bonnet	EN-GJS-450-10	15	Locknut	Carbon Steel Zinc Plated
7	Stem Bushing	Brass HPb59-1	16	Handwheel	EN-GJS-450-10 Pressed Steel
8	Gland	EN-GJS-450-10	17	Stem Packing	EPDM NBR
9	Flat Washer	CS Zinc Plated SS304, SS316	18	Bonnet Gasket	EPDM NBR

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.