

2.22// FLANGED Y-TYPE STRAINER

(SKYV4), PN10/16/25


FEATURES

Connection Ends: Flange to BS EN 1092-2:1997

Working Pressure: PN10/16

Temperature Range: 0°C- 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

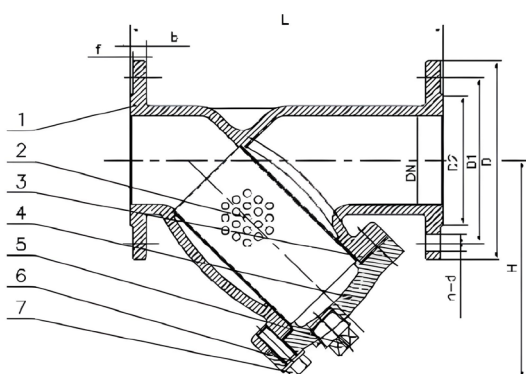

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	5	Plug	Malleable Iron Galvanized Bronze
2	Screen	SS304 (Perforated) SS304, SS316 (Perforated, Knitted, Double Screen)			ASTM B584
3	Gasket	EPDM Graphite+Acanthopore Plate	6	Bolt	CS Zinc Plated SS304, SS316
4	Bonnet	EN-GJS-450-10	7	Flat Washer	CS Zinc Plated SS304, SS316

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.



DIMENSIONS

Short Style

DN		PN	Dimensions (mm)							
Inch	mm		L	D	D1	D2	b	n-φL	f	H
18"	450	10	850	640	565	530	30	20-Φ28	4	693
		16			585	548		20-Φ31		
20"	500	10	1000	715	620	582	31.5	20-Φ28	4	774
		16			650	609		20-Φ34		
24"	600	10	1100	840	725	682	36	20-Φ31	5	956
		16			770	720		20-Φ37		