

4.6// SKY DELIVERY HOSE COUPLING



FEATURES

SKY couplings are designed for use with delivery hoses and for firefighting purposes. The delivery hose couplings are of the pull-release type with ribbed tails and are manufactured to comply with BS 336 standards. They are suitable for use at working pressures up to 15 bar.


Depending on the customer's needs, these couplings are available in various sizes to fit all hose sizes and are made from different materials such as aluminum, brass, and bronze.

- > BSI Kitemark.
- > Castings are clean, sound and free from gross porosity.
- > Coupling washers are made of natural rubber to BS 1154.
- > Plungers are of self-locking type.



MATERIAL SPECIFICATIONS

Sr.	Description	Material
1	Male coupling	Aluminum/Brass/Bronze
2	Female coupling	Aluminum/Brass/Bronze
3	Spring	Stainless Steel
4	Nut	Stainless Steel
5	Seal	Rubber
6	Tongue buckle	Brass
7	Cover	Plastic
8	Handwheel	Aluminum/Brass/Bronze
9	Clamp	Aluminum/Brass

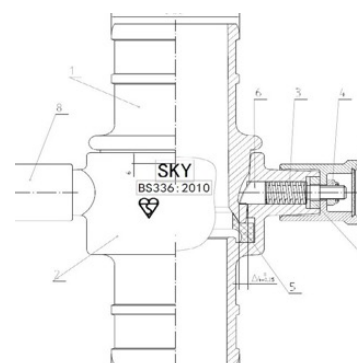

SKY can provide a different type of **coupling to suit all your needs**, such as the "Aluminum Alloy Expansion Ring Instantaneous Hose Couplings".

- > Expansion rings made from seamless soft anneal brass tubing, for maximum expansion without danger of breaking.
- > Permanent roll stamp.
- > Lathe cut synthetic, or EPDM gaskets included with each coupling.
- > Working pressure of 20bar.
- > Connections and Dimensions conforms to BS336.
- > Instantaneous Hose Coupling.

