

2.9// THREADED JOINT RESILIENT NRS GATE VALVE (SKYZ15XS), PN10/16


FEATURES

Connection Ends: ISO 7-1

Working Pressure: PN10/16

Temperature Range: 0°C - 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/ AWWA C550 or painting upon request.

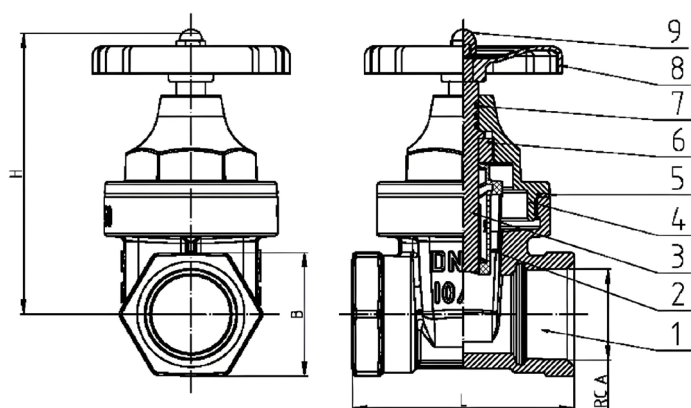

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	6	Nut	Polypropylene
2	Resilient Wedge Disc	EN-GJS-450-10+EPDM	7	O-Ring	NBR EPDM
3	Stem	Brass HPb59-1 SS304, SS316, SS420	8	Handwheel	CS EN-GJS-450-10
4	Bonnet	EN-GJS-450-10	9	Gland Nut	SS304 SS316
5	Sealing Ring	PTFE			

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.



DIMENSIONS

DN		PN	Dimensions (mm)			
Inch	mm		L	H	A	B
1/2"	15	10/16	65	88	1/2	27
3/4"	20	10/16	70	96	3/4	35
1"	25	10/16	80	106	1	41
1 1/4"	32	10/16	90	118	1 1/4	51
1 1/2"	40	10/16	100	145	1 1/2	58.5
2"	50	10/16	110	175	2	72