

2.8// THREADED RESILIENT NRS GATE VALVE

(SKYZ15X), PN10/16


FEATURES

Connection Ends: : ISO 7-1

Working Pressure: PN10/16

Temperature Range: 0°C - 80°C

Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550 or painting upon request.

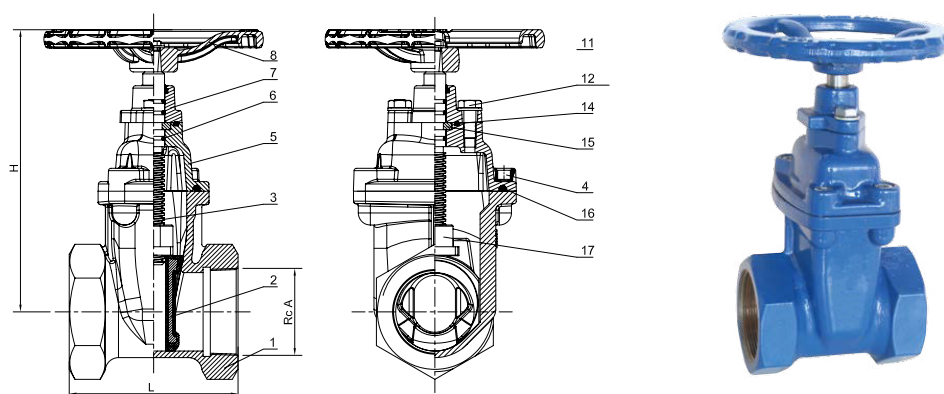

MATERIAL SPECIFICATIONS

|| = Other Options

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	EN-GJS-450-10	8	Handwheel	EN-GJS-450-10
2	Resilient Wedge Disc	EN-GJS-450-10+EPDM	9	Ring Wiper	NBR EPDM
3	Stem	SS420 SS304, SS316, SS431	10	Bolt	CS Zinc Plated SS304, SS316
4	Bolt	CS Zinc Plated SS304, SS316	11	O-Ring	NBR EPDM
5	Bonnet	EN-GJS-450-10	12	Thrust Washer	CS Zinc Plated SS304, SS316
6	O-Ring	NBR EPDM	13	Bonnet Gasket	NBR EPDM
7	Gland	EN-GJS-450-10	14	Wedge Nut	Brass HPb59-1

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.



DIMENSIONS

DN		Dimensions (mm)		
Inch	mm	L	H	A
2"	50	127	210	Rc 2
2.5"	65	140	232	Rc 21/2
3"	80	150	281	Rc 3
4"	100	190	316	Rc 4
5"	125	210	367	Rc 5
6"	150	230	420	Rc 6